

# AN-1000X

## POWERED MONITORS

The AN-1000X is the most versatile powered monitor on the market. You can add it to an A/V rack setup, use it as a studio monitor, install it in a trade show booth, or place it in the Captain's quarters on a US Navy warship to monitor activities in the intelligence room. Just imagine....



### SPECIFICATIONS

AN-1000X	
Rated power:	50 watts continuous @ 4 $\Omega$
Frequency response:	65 Hz - 20 kHz $\pm$ 3dB
Max SPL @ rated power:	103 dB @ 1 meter
Balanced input:	mic / line configurable, female XLR, switchable phantom power
Line input:	Hi-Z, unbalanced, 1/4"-phone & RCA
Line output:	Lo-Z, RCA, buffer isolated line-level
Speaker output:	8 $\Omega$ , unswitched, 1/4"-phone
AC power requirements	
AN-1000X: 1	10 - 125Vac, 50/60 Hz, 90W Max
AN-1000X/220:	208 - 240Vac, 50/60 Hz, 90W Max
Dimensions (HWD):	5.25 x 8.4 x 9", 13 x 21 x 23 cm
Weight:	9.5 lbs, 4.3 Kg

### MADE IN THE USA!

106 dB SPL from 50W Amplifier High Efficiency Speaker

Reach crowds of 400+

Balanced Input, Mic/Line Configurable with Female XLR, Switchable

Phantom Power

Bass and Treble controls

Hi-Z RCA Line Level Input

Hi-Z 1/4" Line Level Output

Magnetically Shielded Speakers

Woven Carbon Fiber Speaker

### 6-YEAR WARRANTY!

### AN-1000X:




FOR MORE INFORMATION PLEASE CALL:

**800.262.4671**

[www.anchoraudio.com](http://www.anchoraudio.com)

# AN-1000X

POWERED MONITOR

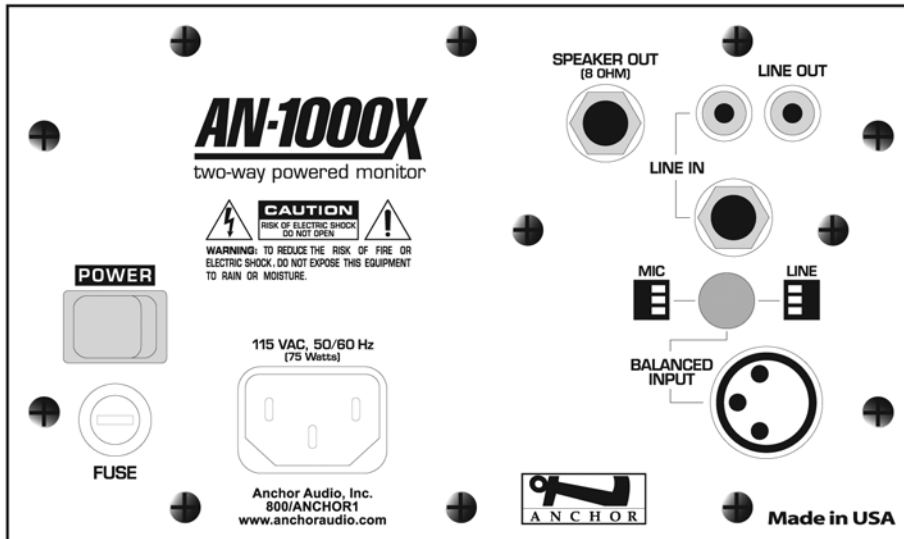

(AN-1000X Back Panel Shown)



## MODELS

### AN-1000X

Powered 50-watt monitor speaker

## ACCESSORIES

### AN-1001X

Unpowered companion speaker

### AN-1001X/70

Two-way speaker with internal 70 volt transformer

### MIC-90

Professional dynamic, cardioid pattern handheld mic

### SS-250

Speaker stand

### MSB-201

Combination mic/speaker stand

### SB-1

Swivel stand mounting bracket

### RM-1

Single rackmount kit

### RM-12

Dual rackmount kit

### SB-3

Wall mounting bracket

### SB-360

360° Swivel wall mounting bracket

### HC-1550

Custom traveling hard case

### HS-1

Carry handle

### CC-100

Storage bag

## MADE IN THE USA!

Reach crowds of 400+

Delivers up to 103 dB of clear sound

Bass and Treble controls

50 watt sound system with response from 65Hz - 20kHz

RCA and 1/4" line inputs

Mic/line configurable XLR input

Magnetically shielded speaker

220 volt CE-compliant model available

Durable injection-molded case

2-way speaker system combines 4.5" woofer and dome tweeter


Speaker output drives companion speaker

**6-YEAR WARRANTY!**

## SPECIFICATIONS

### AN-1000X

Rated power:	50 watts continuous @ 4Ω
Frequency response:	65 Hz - 20 kHz ± 3dB
Max SPL @ rated power:	103 dB @ 1 meter
Balanced input:	mic / line configurable, female XLR, switchable phantom power
Line input:	Hi-Z, unbalanced, 1/4"-phone & RCA
Line output:	Lo-Z, RCA, buffer isolated line-level
Speaker output:	8Ω, unswitched, 1/4"-phone
AC power requirements	
AN-1000X:	110 - 125Vac, 50/60 Hz, 90W Max
AN-1000X/220:	208 - 240Vac, 50/60 Hz, 90W Max
Dimensions (HWD):	5.25 x 8.4 x 9", 13 x 21 x 23 cm
Weight:	9.5 lbs, 4.3 Kg

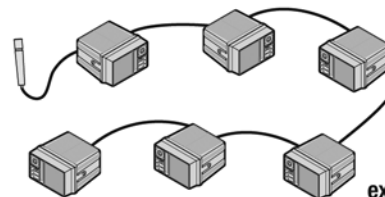

## AN-1000X Daisy-Chain

Simple line-out to line-in connection expands your coverage