


Screen

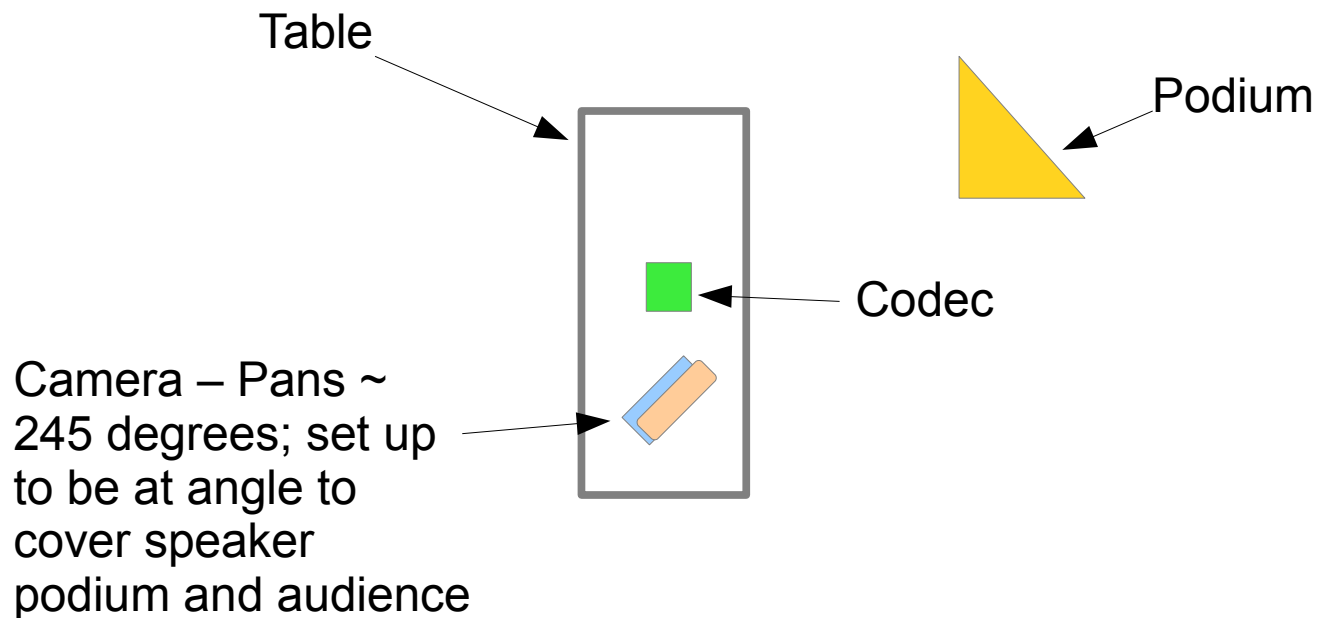

Signal Cabling – LAN to Codec; HDMI out from Codec to UCP HDMI projector input jack; HDMI from camera to HDMI-1 in of Codec; Audio out from Rolls MP222 preamp out (dual 1/4" male TS to 3.5mm Line in of Codec.

Power – to Codec and Camera.

Audio – be sure to use room's ceiling speakers – not wall mounted music quality speakers via Sony amp to avoid feedback because of sound source behind speaker at podium. **Remember all volume control points:** Lifesize Remote, Rolls mixer and preamp, UCP room control panel, projector remote control

UCP Room 113 Videoconferencing setup